

ESSCO CATCH BASINS & DRAIN HUBS ALLOW WATER TO FLOW THROUGH THE DRAIN WHILE BLOCKING HYDROCARBONS, TOXIC & FLAMABLE VAPORS FROM THE ATMOSPHERE. THE CAP IS REMOVABLE TO ALLOW FLUSHING OF ANY HYDROCARBONS THAT COLLECT ON THE WATER SEAL. ESSCO DRAINS MEET EPA REOUIREMENTS FOR THE FOLLOWING:

- 1. EPA COMPLIANCE FOR OOO, B-1 & HON
- 2. API RP 500, 10.13.1, FIGURE 58, TYPE 1 OPEN DRAIN.







## RECOMMENDED CONNECTION

ESSCO RECOMMENDS THE STRAUB COUPLING FOR JOINING THE ESSCO DRAIN HUBS OR CATCH BASINS TO THE UNDERGROUND PIPING. THE STRAUB COUPLING MEETS THE REQUIREMENTS OF ASME B16.5 MAKING IT EOUAL TO A FLANGE OR WELD CONNECTION. THE STRAUB COUPLING IS A MUCH SAFER AND FASTER CONNECTION THAN WELDING TO CARBON STEEL PIPE AND WILL ALSO CONNECT CAST IRON, DUCTILE IRON, HDPE, RCP, & FRP PIPE. THE STRAUB COUPLING MAKES AN EXCEPTIONAL CONNECTION FOR UNDERGROUND PIPING BY ALLOWING THE PIPE TO BE DEFLECTED WITHIN THE COUPLING HOUSING TO MATCH THE SLOPE OF THE SEWER LINE. CONTACT ESSCO (225-753-1505) FOR MORE DETAILS.



STRAUB COUPLINGS CAN BE USED TO CONNECT ALL UNDERGROUND PIPING AND IS A MUCH FASTER AND SAFER CONNECTION THAN WELDING. 4" BUTT WELD, FIELD FIT = 45 MIN. 4" STRAUB CONNECTION = 5 TO 10 MIN.

> **STRAUB COUPLING - 4"** P/N ESSF1LN4W51143


## DRAIN HUB DESIGN REQUIREMENTS

- 1. FLOW REQUIRED (GPM) PER D H -
- 2. LINE SIZE -
- 3. LINE TYPE (CS, CI, DI, HDPE, PVC, ETC.)
- 4. INVERT ELEVATION -

ESSCO DRAIN HUBS CAN BE DESIGNED FOR ANY LINE SIZE & ANY FLOW REQUIREMENT

> CUSTOMER SUPPLIED PIPING CAN BE CARBON STEEL, CAST IRON, DUCTILE IRON OR HDPE

ENVIROSAFE PUMP OR VESSEL DRAIN HUB FOR 4" LINE FLOW RATE = 200 GPM (APPROXIMATE) THROUGH PUMP DRAIN HUB AS DESIGNED FLOW RATE DOES NOT ACCOUNT FOR FRICTION LOSSES IN UNDERGROUND PIPING HIGHER FLOW RATES AVAILABLE, CONTACT ESSCO FOR MORE DETAILS

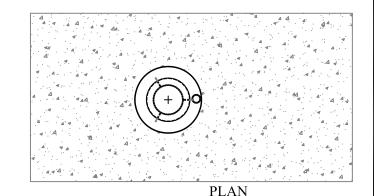

NOTE ESSCO DRAIN HUBS CAN BE USED AS A CLEAN OUT BY SIMPLY REMOVING THE CAP

INSTALL 1" OR SMALLER LINES AS SHOWN TO REMOVE CAP TO FLUSH DRAIN PRIOR TO HOT WORK, ENVIRONMENTAL TESTING OR WHEN USING DRAIN AS A CLEANOUT VOC'S & TOXIC VAPORS FROM ATMOSPHERE WATER LEVEL GUAGE IF THE TOP OF THE GUAGE STRAUB CPLG. BY ESSCO IS VISIBLE, ADD WATER TO SEE RECOMMENDED CONNECTION MAINTAIN PROPER LEVEL 4" OR FOR COMPLIANCE SPECIFY GRADE **SPECIFY** INVERT

> ESSCO DRAIN HUB FOR QQQ, B-1, HON & NSPS COMPLIANT PUMP OR VESSEL INSTALLATION

CUSTOMER:	DATE:	MATERIAL:	TYPE 304 STAINLESS STEEL	DWG. NO:	REV: 0	
	ESSCO PRODUCTS ARE PROTECTED BY U.S. & INTERNATIONAL PATENTS AND/OR PATENTS PENDING	ESSCO DRAIN HUB				
		ESSCC	ENVIROSAFE SE	ENVIROSAFE SEALING SYSTEMS CO., INC.		
			BATON ROL	IGE, LA (225) 753-150	05	
SERIAL NO.:		MODEL: ECB-PDH-10R4-12-SR90				