ESSCO CATCH BASINS & DRAIN HUBS ALLOW WATER TO FLOW THROUGH THE DRAIN WHILE BLOCKING HYDROCARBONS, TOXIC & FLAMABLE VAPORS FROM THE ATMOSPHERE. THE CAP IS REMOVABLE TO ALLOW FLUSHING OF ANY HYDROCARBONS THAT COLLECT ON THE WATER SEAL. ESSCO DRAINS MEET EPA REQUIREMENTS FOR THE FOLLOWING:

- 1. EPA COMPLIANCE FOR OOO, B-1 & HON
- 2. API RP 500, 10.13.1, FIGURE 58, TYPE 1 OPEN DRAIN

RECOMMENDED CONNECTION


ESSCO RECOMMENDS THE STRAUB COUPLING FOR JOINING THE ESSCO DRAIN HUBS OR CATCH BASINS TO THE UNDERGROUND PIPING. THE STRAUB COUPLING MEETS THE REQUIREMENTS OF ASME B16.5 MAKING IT EQUAL TO A FLANGE OR WELD CONNECTION. THE STRAUB COUPLING IS A MUCH SAFER AND FASTER CONNECTION THAN WELDING TO CARBON STEEL PIPE AND WILL ALSO CONNECT CAST IRON, DUCTILE IRON AND HDPE PIPE. THE STRAUB COUPLING MAKES AN EXCEPTIONAL CONNECTION FOR UNDERGROUND PIPING BY ALLOWING THE PIPE TO BE DEFLECTED WITHIN THE COUPLING HOUSING TO MATCH THE SLOPE OF THE SEWER LINE. CONTACT ESSCO (225-753-1505) FOR MORE DETAILS.



STRAUB COUPLINGS CAN BE USED TO CONNECT ALL UNDERGROUND PIPING AND IS A MUCH FASTER AND SAFER CONNECTION THAN WELDING.

4" BUTT WELD, FIELD FIT = 45 MIN. 4" STRAUB CONNECTION = 5 TO 10 MIN.



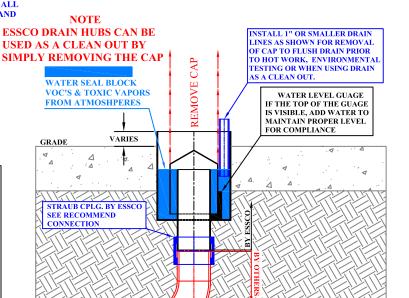

ESSCO DRAIN HUB FOR PUMP OR VESSEL DRAINS OOO, B-1, HON & API 500 TYPE 1 COMPLIANT INSTALLATION

CAN BE CARBON STEEL, CAST

IRON DUCTILE IRON OF HDP

1'-4"

4" SCH 10 SS PIP

DRAIN HUB DESIGN REQUIREMENTS

- 1. FLOW REQUIRED (GPM) PER D H -
- 2. LINE SIZE _____
- 3. LINE TYPE _____ (CS, CI, DI, HDPE, PVC, ETC.)
- 4. INVERT ELEVATION -

ESSCO DRAIN HUBS CAN BE DESIGNED FOR ANY LINE SIZE & ANY FLOW REQUIREMENT

ESSCO QQQ, B-1, HON & API 500 TYPE 1 DRAIN HUB FOR 4" LINE FLOW RATE = 200 GPM (APPROXIMATE) THROUGH PUMP DRAIN HUB AS DESIGNED FLOW RATE DOES NOT ACCOUNT FOR FRICTION LOSSES IN UNDERGROUND PIPING HIGHER FLOW RATES AVAILABLE. CONTACT ESSCO (225) 753-1505 FOR DESIGN DETAILS.

| CUSTOMER: | DATE: | MATERIAL: TY | PE 304 STAINLESS STEEL | DWG. NO: | REV: 0 |
|-------------|---|------------------------|--------------------------------------|----------------------|--------|
| | ESSCO PRODUCTS ARE PROTECTED BY U.S. & INTERNATIONAL PATENTS AND/OR PATENTS PENDING | ESSCO DRAIN HUB | | | |
| l | | ESSCO | ENVIROSAFE SEALING SYSTEMS CO., INC. | | |
| | | | BATON ROU | GE, LA (225) 753-150 |)5 |
| SERIAL NO.: | | MODEL: ECB-PDH-10R4-12 | | | |